



Technical specification



Cold milling machine W 50



		Cold milling machine W 50
Milling width max.		500 mm
Milling depth *1		0–160 mm
Milling drum		
Tool spacing		15 mm
Number of tools		50
Drum diameter with tools		590 mm
Engine		
Manufacturer		Deutz AG
Type		BF 4 M 2011
Cooling		Oil / Air
Number of cylinders		4
Output		60 kW / 80 HP / 82 PS
Engine speed		2,500 min ⁻¹
Displacement		3,110 cm ³
Fuel consumption, 1/1 load		16.4 l/h
Fuel consumption, 2/3 load		11.0 l/h
Emission standards		COM II, EPA II
Electrical system		24 V
Tank capacities		
Fuel tank		165 l
Hydraulic fluid tank		80 l
Water tank		500 l
Speed / gradeability		
Travel speed in 1 st milling gear		0–19 m/min
Travel speed in 2 nd milling gear		0–38 m/min
Travel speed in travel gear, max.		0–6 km/h
Tyres		
Type		Solid rubber
Tyre size front and rear, 3-wheeled model	(dia. x W)	559 x 254 mm
Tyre size front, 4-wheeled model	(dia. x W)	559 x 203 mm
Tyre size rear, 4-wheeled model	(dia. x W)	559 x 254 mm
Conveyor system		
Belt width		400 mm
Theoretical conveyor capacity		82 m ³ /h
Shipping dimensions		
Machine dimensions (L x W x H)		3,480 x 1,670 x 2,365 mm
Conveyor dimensions (L x W x H)		6,100 x 817 x 1,200 mm

*1 = The maximum milling depth may deviate from the value indicated, due to tolerances and wear.


Dimensions in mm

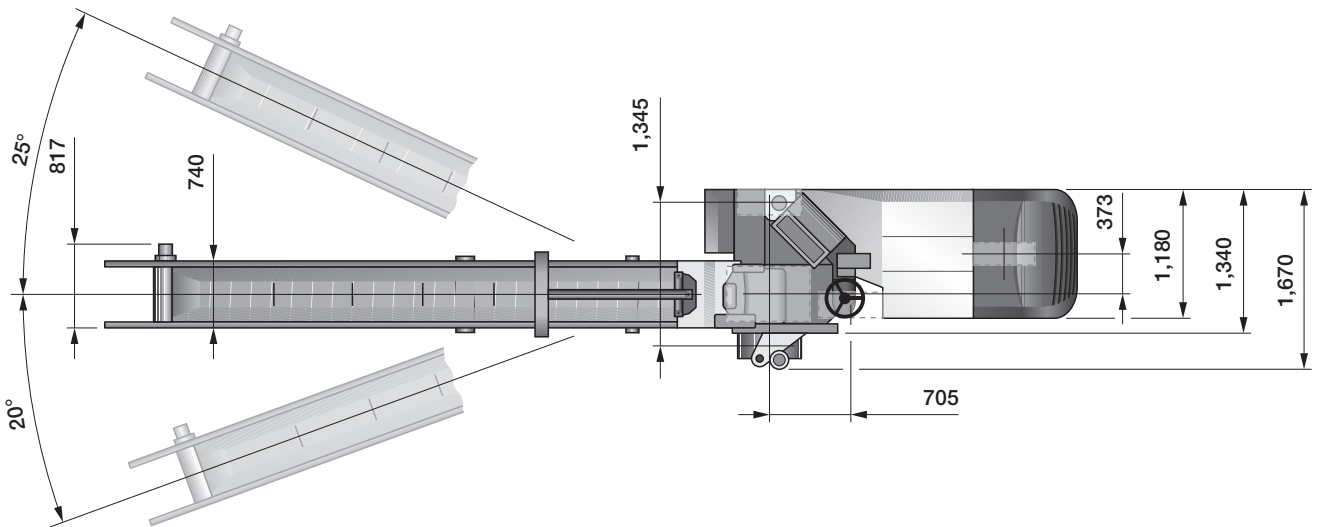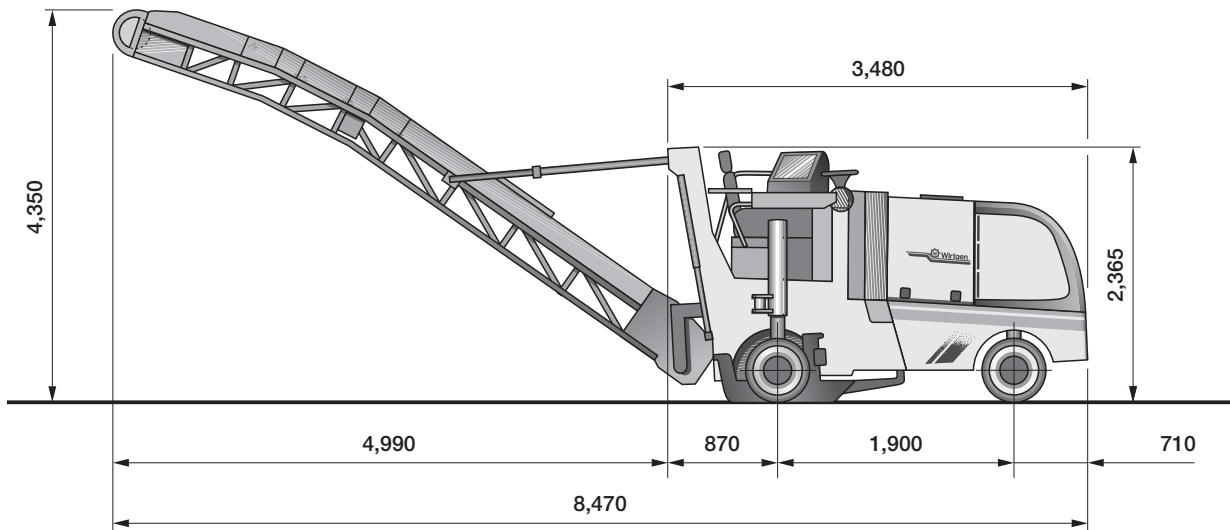


Front view of W 50, 3-wheeled model

Dimensions in mm

with support wheel folded out

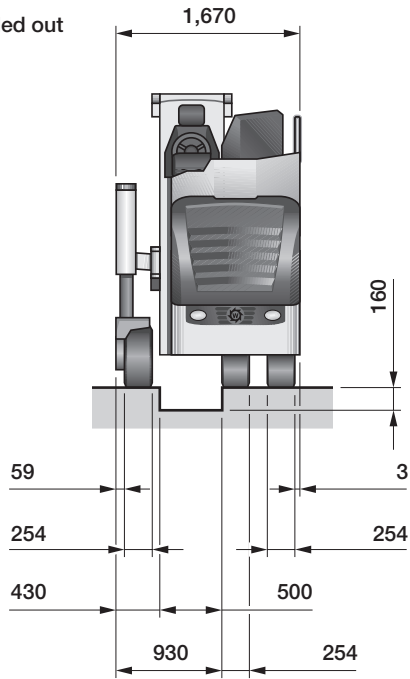


with support wheel folded in

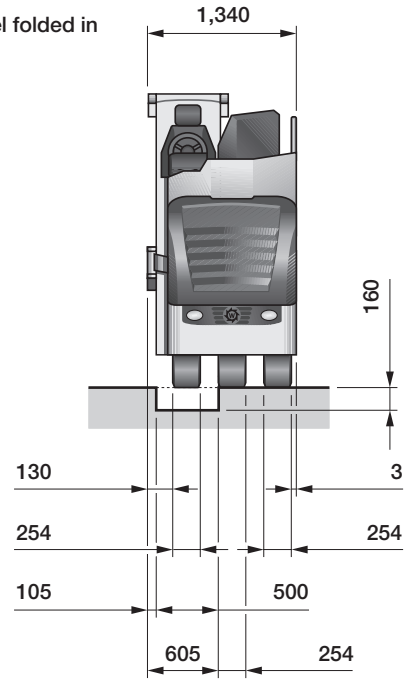


Front view of W 50, 4-wheeled model

Dimensions in mm


with support wheel folded out

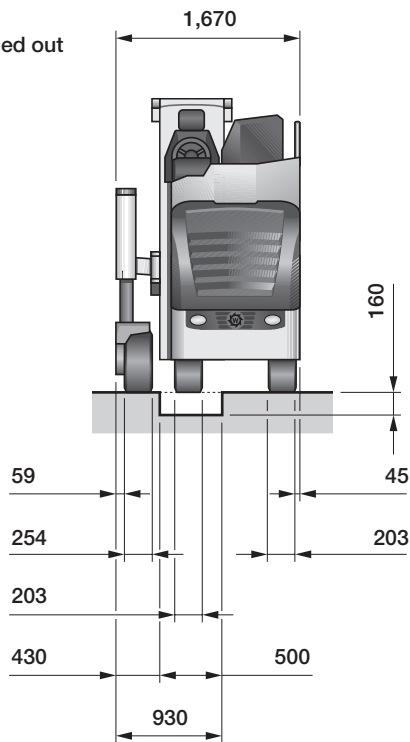


with support wheel folded in

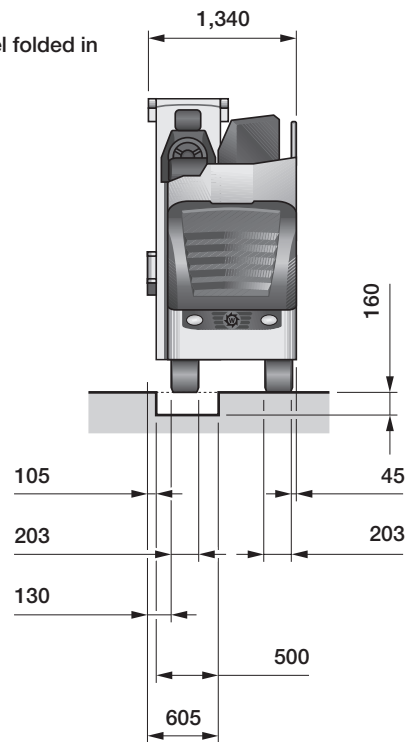

Smallest possible milling radii of W 50, 3-wheeled model, 50 mm milling depth
Dimensions in mm

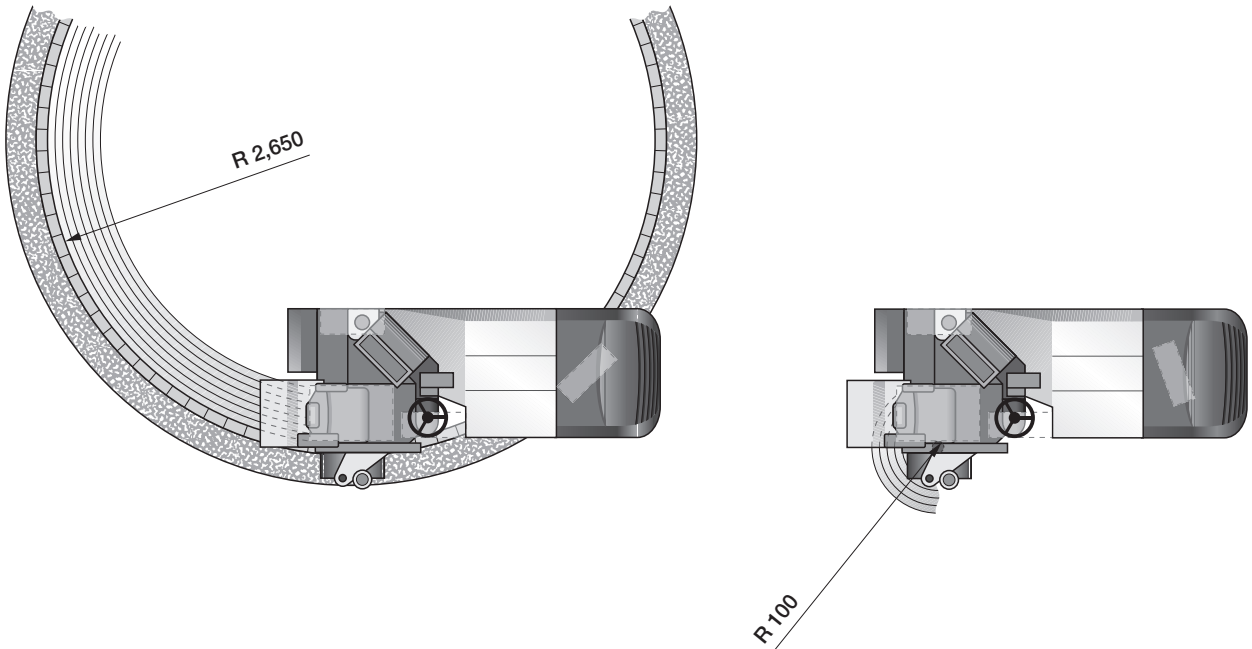


Smallest possible milling radii of W 50, 4-wheeled model, 50 mm milling depth
Dimensions in mm

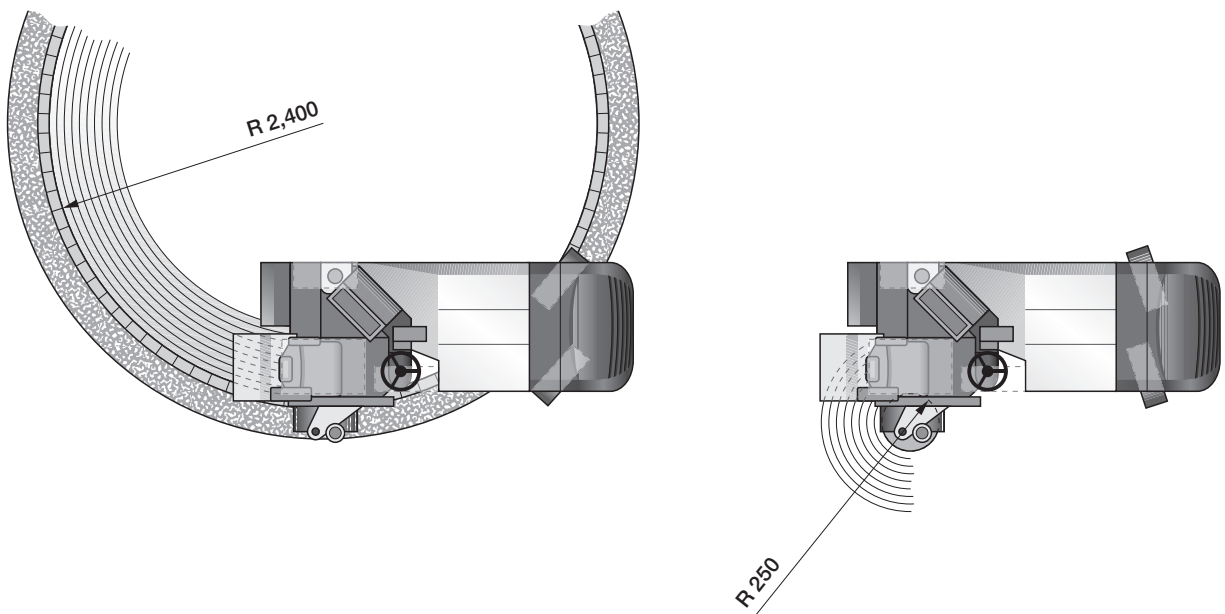

Machine transport with optional folding conveyor and canopy roof

Dimensions in mm

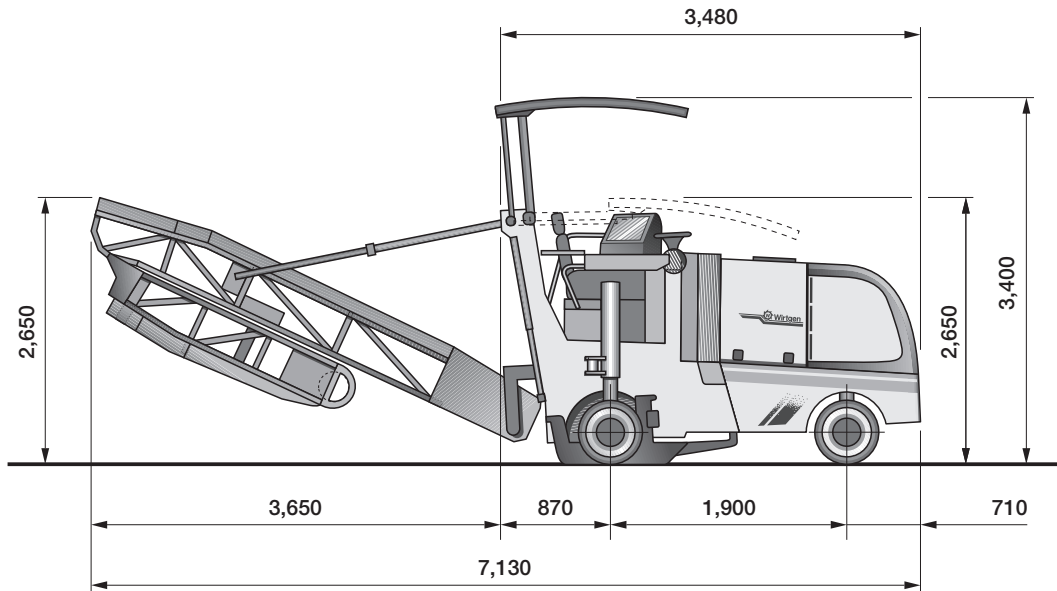

	Standard weights of cold milling machine W 50 3-wheeled model without conveyor
Own weight	6,145 daN (kg)
Operating weight, CE *	6,565 daN (kg)
Operating weight, max.	6,785 daN (kg)
Added / Reduced weight	
Optional loading conveyors	
Conveyor, long	450 daN (kg)
Conveyor, short	250 daN (kg)
Folding conveyor, long	500 daN (kg)
FCS equipment	
FCS tandem scraper	180 daN (kg)
Optional equipment	
Four-wheel design	250 daN (kg)
Canopy	150 daN (kg)

* = Weight of machine with half-full water tank, half-full fuel tank, driver (75 kg) and tools.

Equipment features of cold milling machine W 50

Standard equipment:

Operator's platform

- Convenient access to operator's platform
- Fully vibration-damped operator's platform
- Standard driver's seat adjustable in direction of travel
- Convenient control panel with practical switches
- Digital multi-functional display in control panel
- Height-adjustable steering wheel
- Multi-functional machine operation integrated in right-hand armrest
- Lockable covers for control panels
- Exterior rear view mirror, left
- Reversing horn

Machine control system

- Mechanical height adjustment
- Automatically engageable hydraulic traction control (flow divider)
- Manual milling speed control
- Engageable water injection in milling chamber

Engine

- Water-cooled engine
- Highly effective soundproofing of entire engine compartment

Milling drum assembly with milling drum

- Milling drum in welded double-pin toolholder design
- Right-hand side plate in hinged design
- Hydraulically lifting side plates, left and right

Loading the milled material

- Model without loading conveyor and without scraper blade with simple rear flap

Travelling gear / Height adjustment

- 3-wheeled chassis
- Mechanically folding rear right support wheel
- Two speeds for height adjustment

Miscellaneous

- Lighting package with 3 spotlights
- Comprehensive tool kit
- Safety package with emergency stop button
- Additional storage compartment for cutting tool containers

Optional Equipment:

Operator's platform

- Canopy, mechanically foldable and adjustable to either side
- Comfort driver's seat with individual adjustment to either side and in longitudinal direction
- Additional illumination of control panel, night design
- Exterior rear view mirror, right

Machine control system

- Digital electric height indication
- Automatic levelling system Level Pro with one wire-rope sensor each edge protection right, and edge protection left
- Slope sensor

Engine

- Operation of cold milling machine with bio-degradable hydraulic fluid

Milling drum assembly with milling drum

- Milling drum unit, 400 mm milling width, HT01, with scraper blade
- Milling drum unit, 300 mm milling width, HT01, with scraper blade
- Milling ring, 80 mm milling width, 300 mm milling depth
- Fine milling drum, 500 mm milling width, HT01, 6 mm tool spacing
- Additional milling drums
- Additional lock-valve for scraper blade
- FCS tandem scraper
- Mounting carriage for milling drums
- Hydraulically adjustable front sealing

Loading the milled material

- Discharge conveyor, 5,600 mm long
- Mechanically folding discharge conveyor, 5,600 mm long
- Short discharge conveyor, 1,100 mm long
- Model without loading conveyor but with scraper blade

Travelling gear/Height adjustment

- 4-wheeled chassis

Miscellaneous

- Special painting
- Lighting package with 3 spotlights and direction indicators
- Additional hydraulic connection for ancillary hydraulic equipment



Wirtgen GmbH
Reinhard-Wirtgen-Strasse 2 · 53578 Windhagen · Germany
Phone: +49 (0) 26 45/131-0 · Fax: +49 (0) 26 45/131-242
Internet: www.wirtgen.com · E-Mail: info@wirtgen.com